

# TECHNICAL DATA

## REGUPOL COMFORT 8



### Product

Impact sound insulating underlayment for various floor structures under screed beds and floating floors with a maximum traffic load  $\leq 5 \text{ kN/m}^2$ , CE certified as per European Technical Assessment



### Material

- PUR-bonded elastomers
- Dimpled profile on the underside

### Weight

2.4 kg/m<sup>2</sup>



### Dimensions

Length: 13,000 mm, Width: 1,150 mm, Thickness: 8 mm



### Applications

Under screed beds and floating floors for both residential and commercial use, traffic load  $< 5 \text{ kN/m}^2$ , e. g. floor renovations, new buildings, reconstructions of apartments, commercial buildings or hotels.

### Certification

European Technical Assessment ETA-17/1030

**Cradle to Cradle Certified**® is a registered trademark of the Cradle to Cradle Products Innovation Institute (C2CPII).

| Acoustical Performance*  | Standard                               | Result                          | Comment                        |
|--|--|---------------------------------|--------------------------------|
| Under cement screed:   |  |                                 |                                |
| 90 mm cement screed,<br><b>REGUPOL comfort 8</b> ,<br>140 mm concrete slab | DIN EN ISO 10140-3<br>DIN EN ISO 717-2 | $\Delta L_w \geq 26 \text{ dB}$ | Test report<br>PB 4.2/13-430-1 |
| Under RenoScreed®:   |  |                                 |                                |
| 35 mm RenoScreed®,<br><b>REGUPOL comfort 8</b> ,<br>140 mm concrete slab   | DIN EN ISO 10140-3<br>DIN EN ISO 717-2 | $\Delta L_w \geq 23 \text{ dB}$ | Test report<br>PB 4.2/16-088-2 |

\*Assembly from top to bottom

| Material properties          | Standard       | Result                        |
|------------------------------|----------------|-------------------------------|
| Maximum traffic load         |                | $\leq 5 \text{ kN/m}^2$       |
| Mean dynamic stiffness value | DIN EN 29052-1 | $s'_t \leq 16 \text{ MN/m}^3$ |
| Compressibility              | DIN EN 12431   | $c \leq 1 \text{ mm}$         |

| Fire behaviour      | Standard       | Result |
|---------------------|----------------|--------|
| Fire classification | DIN EN 13501-1 | E      |

# TECHNICAL DATA

## REGUPOL COMFORT 8




| Thermal behaviour   | Standard     | Result                             | Comment                            |
|---|--------------|------------------------------------|------------------------------------|
| Thermal conductivity  | DIN EN 12667 | $\lambda = 0.06 \text{ W/(mK)}$    |                                    |
| Thermal resistance  | DIN EN 12667 | $R = 0.10 \text{ (m}^2\text{K)/W}$ |                                    |
| Temperature resistance  |              | -20 to +60° C                      |                                    |
| Deformation under specified compressive load and temperature conditions; Difference of relative deformations $\epsilon_1$ and $\epsilon_2$ of Level A: 23 ±5°C / 48 ±1 h Level B: 35 ±1°C / 48 ±1 h | DIN EN 1605  | $\Delta \epsilon \leq 5,0 \%$      | Suitable for floor heating systems |

| Moisture behaviour        | Standard         | Result   | Comment   |
|---------------------------|------------------|--|---|
| Water vapour permeability | DIN EN ISO 12572 | $S_d = 0.0225 \text{ [m]}$   | Diffusion equivalent air layer thickness                    |
|                           |                  | $\mu = 3.75 \text{ [-]}$   | Diffusion resistance factor, Material is open for diffusion |
| Sensitivity to moisture   |                  | To be protected from moisture during storage, transport and installation |   |

| Health protection | Standard     | Result   |
|-------------------|--------------|--|
| VOC               | DIN EN 16516 | compliant with EU-LCI list and German AgBB scheme; "A+" as per décret n°2011-321 |
| Nitrosamine       | DIK Method   | Compliant with German Model Building Regulation                                  |
| PAH               | DIN EN 18287 | Compliant with German Model Building Regulation                                  |

### Floor Assembly

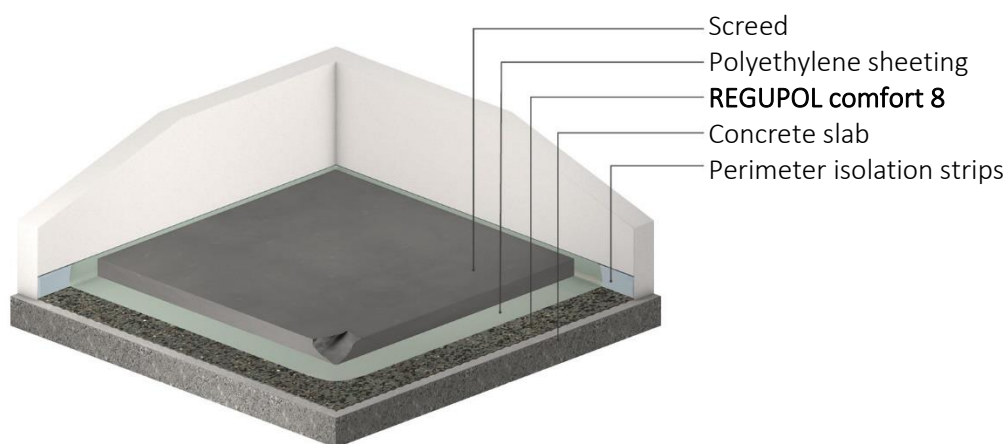

For more assemblies and test reports, please visit [www.regupol.com](http://www.regupol.com)