





INSTALLATION GUIDELINE

VERLEGEANLEITUNG








RECOMMANDATION D'INSTALLATION

REGUPOL sound and drain 22






Empfehlung: Druckfestigkeit der Wärmedämmung ≥ 300 kPa.
Recommendation: Compressive strength of thermal insulation ≥ 300 kPa.
Recommandation: Résistance à la compression de l'isolation thermique ≥ 300 kPa.

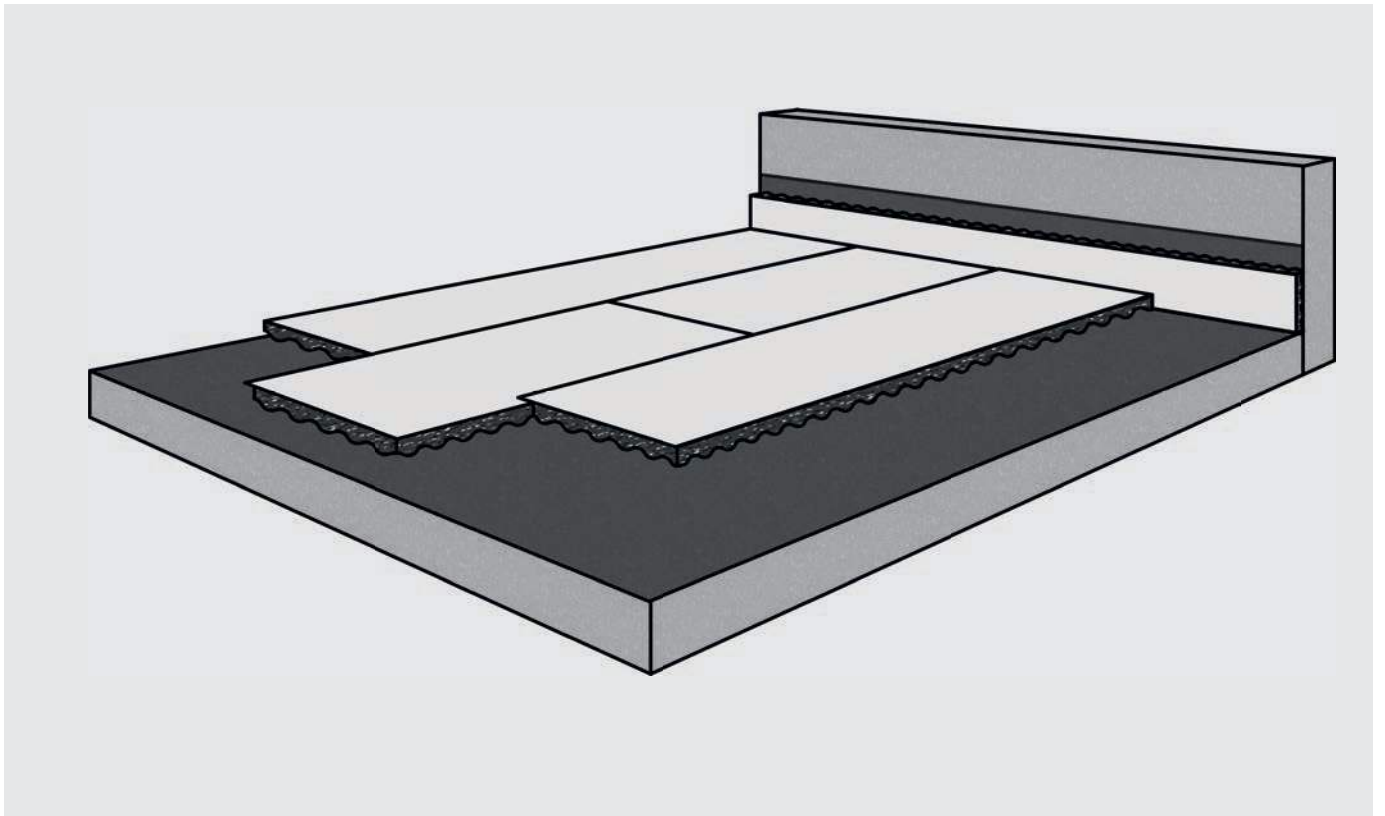

+ PVC ?



+49 2751 803-0